


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 09-22 NEW AGE ASPEN
T38N R9E SECTIONS 7 & 8
HARVEST ACRES - 98**


01/06
12/07



Scale: 4" = 1 Mile
1:15,840

Legend

- ⊗ Berms
- * Vernal Pond
- ⊕ Section Corner
- +— Pink Flag Line (If Needed)
- Red Line
- - - Woods Roads
- ▬▬▬ Highways and Town Roads
-  Tag Alder/Lowland Area

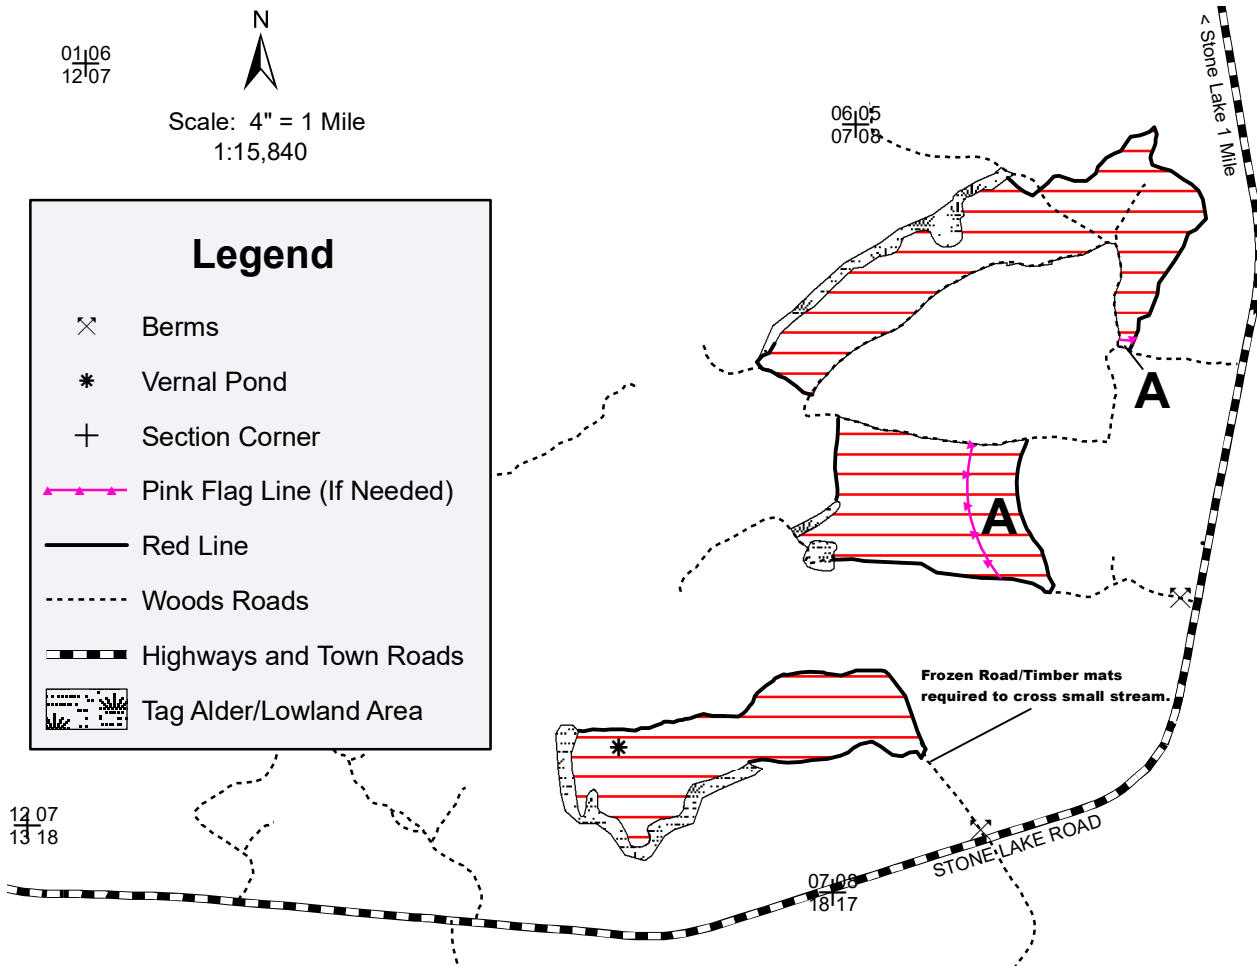

Note: All logging operations require frozen ground conditions. Do NOT cut any dead trees or trees with cavities. Do not cut green marked trees. No harvesting within 15 feet of any vernal ponds. SEASONAL RESTRICTION: In ZONE A, all logging operations must be completed once started. Operations, in ZONE A, will not be permitted from March 20 - July 31.



Aspen Regeneration Area (98 Acres); Cut all aspen, maple, white birch and balsam fir containing 3 or more pulp sticks. Leave all other species uncut.
Cut all 1-5 inch aspen and maple.

All stands are within Mgmt. Area 6:
Oneida Sandy Plains -
Forest Production Area



Map produced by
Jim Wetterau, 6/22

NH-ALSF TRACT 9-22

New Age Aspen

Oneida County

Town 38 North, Range 9 East

Section 7 – E1/2NE; E1/2SE; SWSE

Section 8 – NW1/4; W1/2SW

No bid bond required.

The cutting area is approximately 98 acres.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

ESTIMATED VOLUME (TONS)

MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>
Balsam Fir	470	580
Aspen	3500	4410
Mx. Hardwood ¹	1390	1725

Total Minimum Bid Value \$ 48,328.00

¹Volume includes 81% red maple, 14% white birch, and 5% sugar maple. Volume includes 8 MBF of white birch and 9 MBF of red maple potential logs. Weighted average conversion is 2.306 tons/cord. The total sale volume equates to approximately 54.69 tons/acre or 24.28 cords/acre based on a 4" top utilization.

Special Conditions:

1. **SEASONAL RESTRICTIONS:** All logging operations require frozen ground conditions. In Zone A, all logging operations must be completed once started within that winter. Operations, in Zone A, will not be permitted from March 20 - July 31.
2. A frozen road (ice road) and/or timber mats will be required, for a small stream crossing, to use the main woods road on the south cutting unit. Timber mats are available from the NHAL State Forest on a first come first served basis.
3. Cutting must be concurrent for all species to be harvested.
4. Leave all dead trees and obvious den trees standing unless they create a hazard to harvesting operations. If cut, leave snags where they fall. Do not cut any red, blue or green marked trees.
5. Do not harvest trees or operate machinery within 15 feet of any vernal pond and do not deposit any slash or tops in them. No tops or slash allowed in any grass opening or within any wetland.
6. All landings and any new woods roads must be approved prior to sale start up.
7. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.